

FREEDOMLINE



by Aquatic

2010 ADA Standards for Accessible Design

608.7 Thresholds: Roll-in Showers. Thresholds in roll-in type shower compartments shall be 1/2 inch (13 mm) high maximum. This change in level may be beveled, or may be a combination of 1/4 inch (6.4 mm) vertical and 1/4 inch beveled, providing the combined change in level does not exceed 1/2 inch.

608.7 Thresholds: Transfer Showers. In transfer type shower compartments, thresholds 1/2 inch (13mm) high maximum shall be beveled, rounded, or vertical.

EXCEPTION: A threshold 2 inches (51mm) high maximum shall be permitted in transfer type shower compartments in existing facilities where recessing into floor would disturb the structural reinforcement on the floor slab.

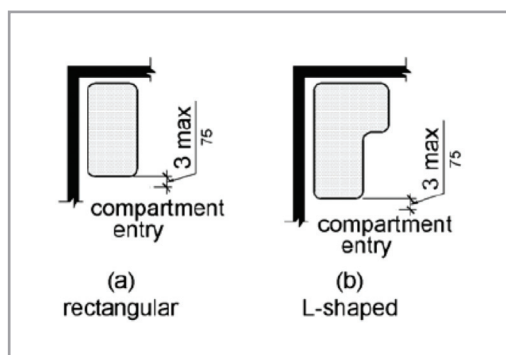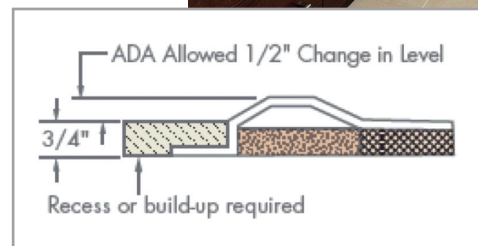

610.3 Shower Compartment Seats: Where a seat is provided in a standard roll-in shower compartment, it shall be a folding type, shall be installed on the side wall adjacent to the controls, and shall extend from the back wall to a point within 3 inches (75 mm) of the compartment entry. In transfer-type showers, the seat shall extend from the back wall to a point within 3 inches (75 mm) of the compartment entry. The top of the seat shall be 17 inches (430 mm) minimum and 19 inches (485 mm) maximum above the bathroom finish floor. Seats shall comply with 610.3.1 or 610.3.2.

Note: Bold type represents new changes effective 2010